

## 655nm FP Laser Diode



### Description

The PL-FP-655-1-A81-PA is single mode laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). Coupled with Fibercore SM600 fiber. This Module is pigtailed with 0.7-1.0 m of single mode polarization maintaining fiber and connectorized by FC/APC connector.

### Features

- Optical output: 30mW
- FC-APC connector
- Efficient coupling into single mode fiber
- 14-pin butterfly package
- CW or pulsed operation
- Internal monitor PD and TEC
- SM or PM Fiber ( $\phi$ 0.9mm)

### Application

- Fiber transmission systems
- Laser interferometric
- Laser indication
- Testing Light source


Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

## Laser Specifications

Electrical/Optical Characteristics(T<sub>sub</sub>=25°C, CW bias unless stated otherwise)


Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	$\lambda$	652	655	658	nm
Spectral Width	$\Delta\lambda$	0.6	0.8	1.2	nm
Threshold Current	I <sub>th</sub>		20	30	mA
Operating Current	I <sub>op</sub>		120	150	mA
Fiber output Power	P <sub>f</sub>	10	20	30	mW
PD Dark Current (VRD=5V)	I <sub>d</sub>			0.1	uA
Extinction Ratio (PM VERSION)	PER	17	20		dB
Coupled Fiber Type	Fibercore SM600 (NA=0.14)				
Forward Voltage	V <sub>f</sub>		1.8	2.5	V
Thermistor Resistance	R <sub>T</sub>	9.5	10	10.5	KΩ
Thermistor Temp. Coefficient			-4.4		%/°C
Connector	FC/APC				

## Spectrum

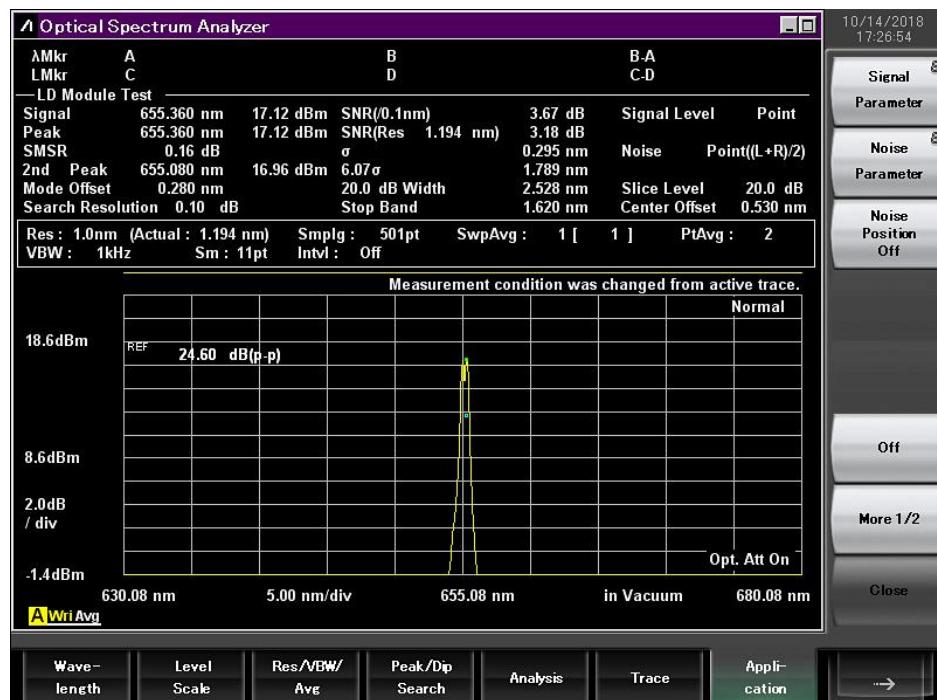


Headquarters:288,Woolands Loop,#04-00,Singapore 738100

## L-I Curve

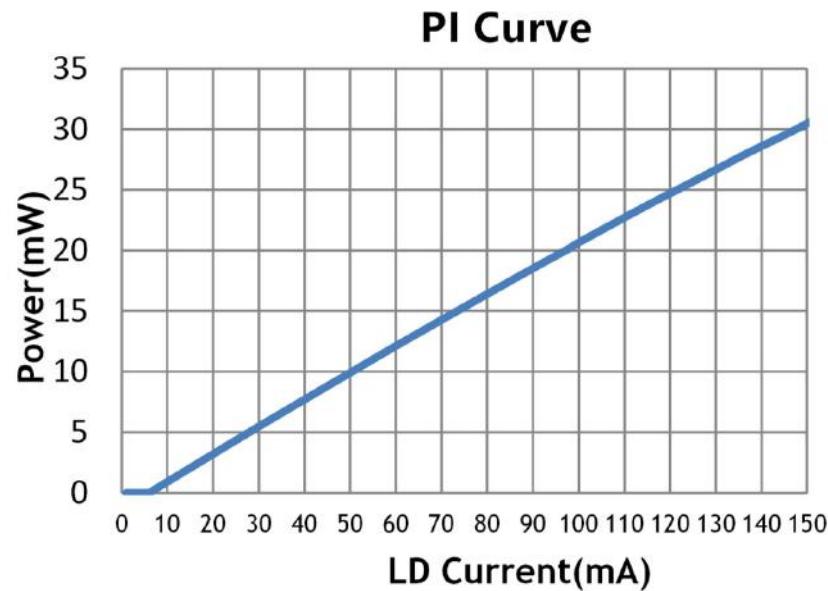


## Package Size

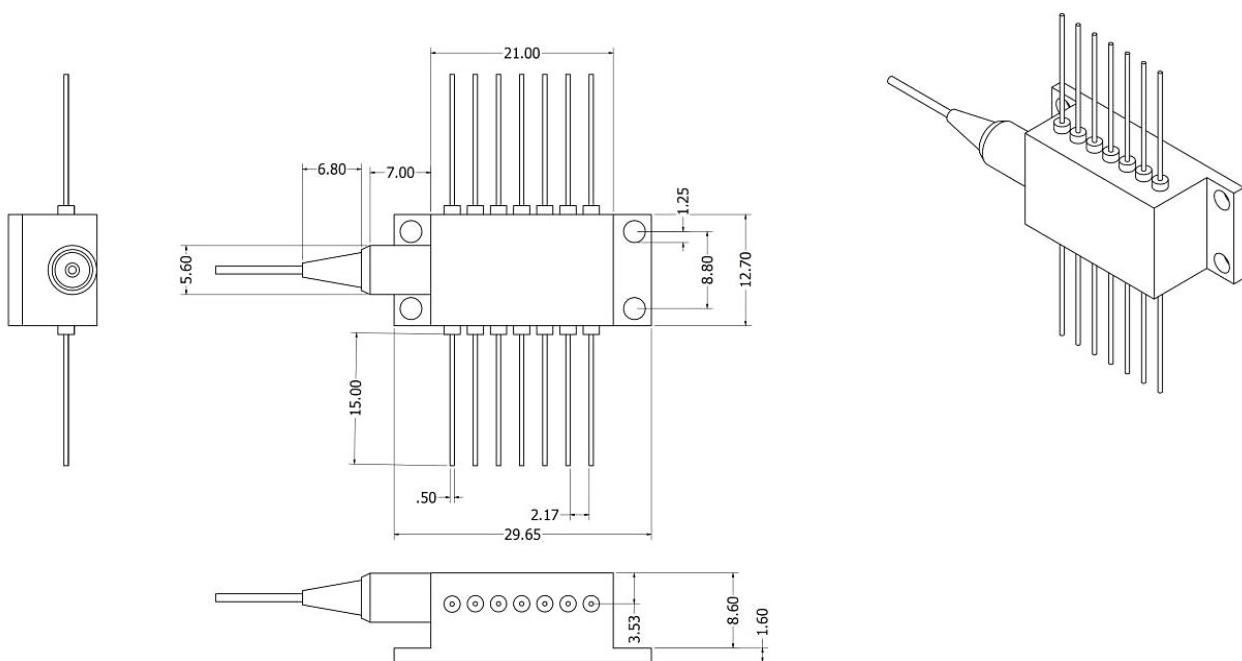

Headquarters: 288, Woolands Loop, #04-00, Singapore 738100

## Pin Definition

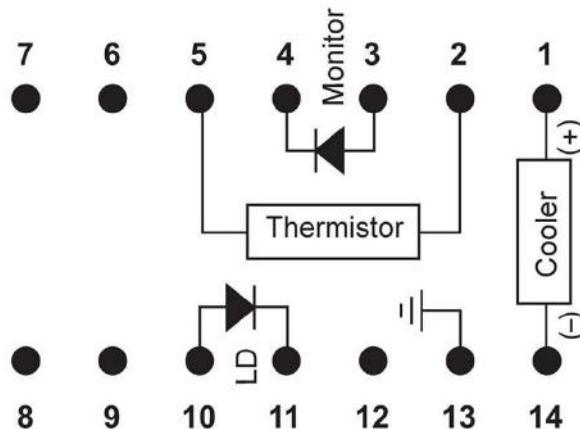

1	Thermoelectric Cooler (+)	8	N/C
2	Thermistor	9	N/C
3	PD Monitor Anode (-)	10	Laser Anode (+)
4	PD Monitor Cathode (+)	11	Laser Cathode (-)
5	Thermistor	12	N/C
6	N/C	13	Case Ground
7	N/C	14	Thermoelectric Cooler (-)

## Absolute Maximum Ratings

Item	Unit	Min	Typ	Max
Case Temperature	°C	-20	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	120	150
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	1.2	1.4
Reverse Voltage(LD)	V	-	-	1.8
Reverse Voltage(PD)	V	-	-	10

## OEM Info

PL-FP-□□□□-☆-A8▽-XX

□□□□:Wavelength

405:405nm

633:633nm

655:655nm

680:680nm

850:850nm

\*\*\*\*\*

Headquarters:288,Woolands Loop,#04-00,Singapore 738100

1550:1550nm

☆ :Output Power

1:20mW

2:30mW

▽:Wavelength Tolerance

1: $\pm$ 1nm2: $\pm$ 2nm

XX: Fiber and Connector Type

SA=SM600+ FC/APC

SP=SM600+ FC/PC

PP=PM Fiber+ FC/PC

PA=PM Fiber+ FC/APC