

# 520nm FP-LD SM Fiber Coupled Laser Diode



## Description:

The PL-FP-520-A-A81-SA is single mode laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). Coupled with Nufern HP460 fiber. This Module is pigtailed with 0.7-1.0 m of single mode polarization maintaining fiber and connectorized by FC/APC connector.

## Features:

- Optical output: 30mW
- FC/APC connector
- Efficient coupling into single mode fiber
- 14-pin butterfly package
- CW or pulsed operation
- Internal monitor PD and TEC
- SM or PM Fiber ( $\phi$ 0.9mm)

## Application:

- Fiber transmission systems
- Laser interferometric
- Laser indication
- Testing Light source

## Laser Specifications:

T<sub>sub</sub>=25°C, CW bias unless stated otherwise


Parameter	Symbol	Min	Typ	Max	Unit
Centre Wavelength	$\lambda$	518	520	522	nm
Spectral Width	$\Delta\lambda$	0.6	0.8	1.2	nm
Threshold Current	I <sub>th</sub>		20	30	mA
Operating Current	I <sub>op</sub>		120	150	mA
Fiber output Power	P <sub>f</sub>	10	20	30	mW
PD Dark Current (VRD=5V)	I <sub>d</sub>			0.1	uA
Extinction Ratio PM VERSION	PER	17	20		dB
Coupled Fiber Type	Nufern HP460 NA=0.14				
Forward Voltage	V <sub>f</sub>		6	8	V
Thermistor Resistance	R <sub>T</sub>	9.5	10	10.5	KΩ
Thermistor Temp. Coefficient			-4.4		%/°C
Connector	FC/APC				

## Spectrum:




Headquarters: 288, Woolands Loop, #04-00, Singapore 738100


## L-I Curve:

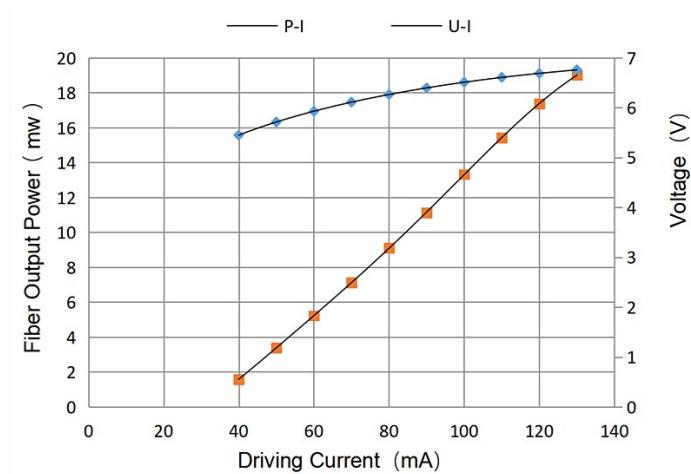

## Package Size and pin definition:

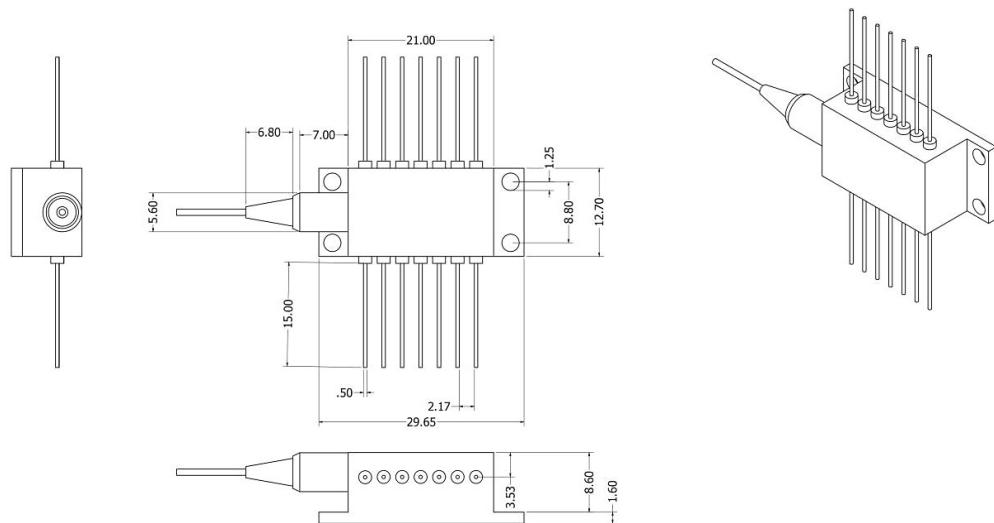

## Package Size:

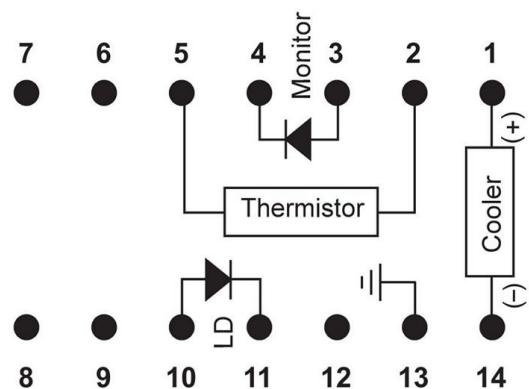

1	Thermoelectric Cooler (+)	8	N/C
2	Thermistor	9	N/C
3	PD Monitor Anode (-)	10	Laser Anode (+)
4	PD Monitor Cathode (+)	11	Laser Cathode (-)
5	Thermistor	12	N/C
6	N/C	13	Case Ground
7	N/C	14	Thermoelectric Cooler (-)

## ABSOLUTE MAXIMUM RATINGS:

Item	Unit	Min	Typ	Max
Case Temperature	°C	-5	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	120	150
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	1.2	1.4
Reverse Voltage (LD)	V	-	-	1.8
Reverse Voltage (PD)	V	-	-	10

## Ordering Info:

PL-FP-□□□□-☆-A8▽-XX

□□□□: Wavelength

405: 405nm

520: 520nm

633: 633nm

680: 680nm

850: 850nm

\*\*\*\*\*

1550:1550nm

☆: Output Power

A: 20mW

B: 30mW

▽:Wavelength Tolerance

1: ±1nm

2: ±2nm

XX: Fiber and Connector Type

Headquarters:288,Woolands Loop, #04-00,Singapore 738100

SA=HP460+ FC/APC

SP=HP460+ FC/PC

PP=PM Fiber+ FC/PC

PA=PM Fiber+ FC/APC

Headquarters:288,Woolands Loop, #04-00,Singapore 738100